
 Square Tower (1.9m) Angled Tower (1.1m) Ne 2 x Triangular Tower (1.9m) Slide (1.9m) Cu Pole Slide (1.5m) Inverted Climber (1.9m) Sp Climbing Wall (1.5m) Rope Ramp (1.1m) Sp Trapeze Handles Lo 	ined Bridge bined	Option A-Dark Blue/Yellow Option B-Dark Blue/Yellow Option C-Bare Option C-Bare Option C-Bare Dark Blue/Yellow Option B-Dark Blue/Yellow Dark Blue/Yellow Option C-Bare Dark Blue/Yellow Bark Blue/Yellow<
Technical Information Equipment Dimensions		
Length / Width / Height Surfacing and Area Required	16.1m x 8.0m x 3.8m	
Recommended Minimum Space L/W/H Max Gradient of Ground Free Height of Fall Impact Area	20.0m x 12.2m x 5.0m 1 in 50 1.9m 126.90m ²	
Synthetic Area (i.e. EPDM / Wetpour / Synthetic Grass etc.) Loosefill at 250mm (i.e. Bark / Cushionfall / Sand)	127.81m ² 40m ³	
Grasslok Tiles	159m ² Steel Ground Fixed	Surface Fixed
Installation Time Overall Weight Heaviest Part Largest Part	2 Person(s) 30 Hour(s) 2210kg 40kg 3.7m x 0.5m x 0.5m	(if different)
Longest Part Concrete Required	3.7m 2.4m ³	

Click here for more information & downloads

¥

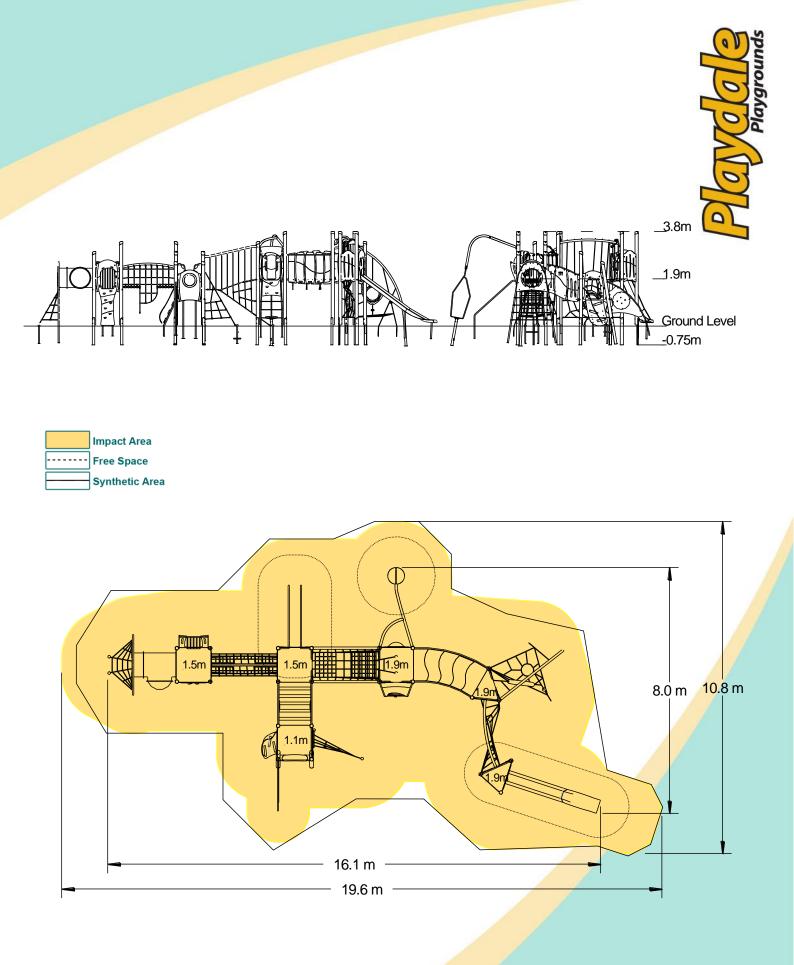

Click here for more information & downloads

¥